



mato^{2018-HD}

mato




MATO GmbH & Co KG, Main Production Facility and Administration Headquarters, Mühlheim a.M., Deutschland

mato

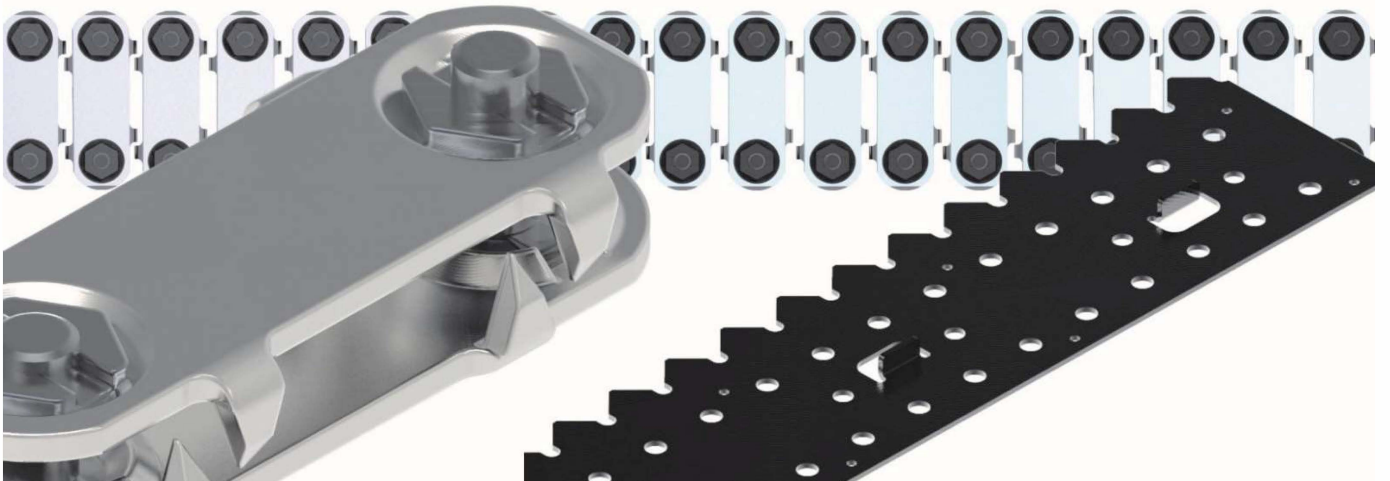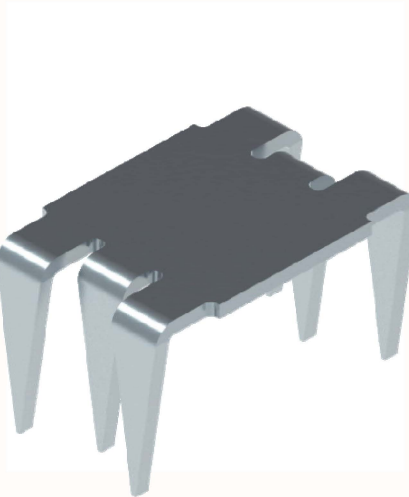

The **Screw System MS** is used for belt splicing and rip repairs. It is easy to install.
The Fastener guarantees good compression into the belt (vice like effect)

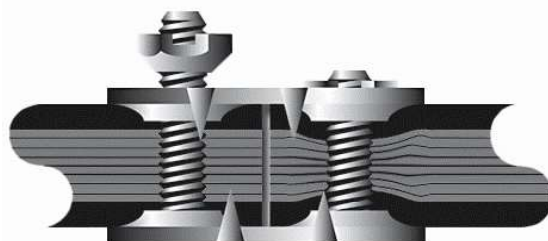

Fastener	MS1	MS140	MS190	MS1½	MS2	MS2¼	MS2½	MS3
Belt Thickness mm	5-11	5-11	8-14	11-17	14-21	14-30	19-25	>24
Belt Strength kN/m	300	400	630	500	800	1050	800	1050
Min Pulley Ø mm	250	300	400	400	700	1000	1000	1000

Description	Width	Order No.	kg
-------------	-------	-----------	----

Belt Fastener MS - Box

Content 25 units

MS1	750 mm	46 100 60 10	1.4
MS140	750 mm	46 100 60 53	1.8
MS190	750 mm	46 100 60 54	2.0
MS1½	950 mm	46 100 60 30	2.5
MS2	1050 mm	46 100 60 40	3.3
MS2¼	1050 mm	46 000 11 72	4.6


Belt Fastener MS - Box

Content 10 units

MS2½	500 mm	46 100 60 60	2.7
MS3	500 mm	46 000 13 54	3.0

Material Upper / Lower Plate:
Special Steel

Belt Fastener MS - Bucket

Content 100 units

MS1	3000 mm	46 000 09 82	5.7
MS140	3000 mm	46 000 09 78	7.2
MS190	3000 mm	46 000 09 79	8.1
MS1½	3800 mm	46 000 09 83	9.8
MS2	4200 mm	46 000 09 84	13.3
MS2¼	4200 mm	46 000 11 73	18.3

Steel Series Fastener for general
application

Belt Fastener MS - Bucket

Content 50 units

MS2½	2500 mm	41 178 17 71	13.5
MS3	2500 mm	41 178 17 72	15.0

Description	Width	Order No.	kg
Belt Fastener MS H - Box			
Content 25 units			
MS1H	750 mm	46 100 62 48	1.4
MS140H	750 mm	46 100 62 51	1.8
MS190H	750 mm	46 100 62 52	2.0
MS1½H	950 mm	46 100 62 49	2.5
MS2H	1050 mm	46 100 62 50	3.3



Belt Fastener MS H - Bucket			
Content 100 units			
MS1H	3000 mm	46 000 09 85	5.7
MS140H	3000 mm	46 000 09 80	7.2
MS190H	3000 mm	46 000 09 81	8.1
MS1½H	3800 mm	46 000 09 86	9.8
MS2H	4200 mm	46 000 09 87	13.3

Material Upper Plate:
High Carbon Steel
Material Lower Plate:
Special Steel

Fastener with Upper Plate made of high carbon steel for higher wear resistance

Belt Fastener MS B - Box			
Content 25 units			
MS140B	750 mm	41 178 17 74	1.8
MS190B	750 mm	41 178 17 75	2.0
MS1½B	950 mm	41 178 17 76	2.5
MS2B	1050 mm	41 178 17 77	3.3



Belt Fastener MS B - Bucket			
Content 100 units			
MS140B	3000 mm	41 178 17 78	7.2
MS190B	3000 mm	41 178 17 79	8.1
MS1½B	3800 mm	41 178 17 80	9.8
MS2B	4200 mm	46 101 09 87	13.3

Material Upper / Lower Plate:
High Carbon Steel

Fastener with Upper and Lower Plate made of high carbon steel for higher wear resistance


Description	Order No.	kg
Belt Punch		
SL1-140-190	46 100 67 23	0.1
SL1½-2-2¼	46 100 67 24	0.1
SL2½-3	46 100 67 25	0.2
Power Punch		
ML1-140-190	46 100 67 29	0.1
ML1½-2-2¼	46 100 67 30	0.1
ML2½-3	46 100 67 31	0.1
Hand Nut Tightener		
HS1-140-190	46 100 67 26	0.2
HS1½-2-2¼	46 100 67 27	0.2
HS2½-3	46 100 67 28	0.3
Brace Nut Tightener		
HB1-140-190	46 100 66 05	0.1
HB1½-2-2¼	46 100 66 10	0.1
HB2½-3	46 100 66 15	0.1
Power Nut Tightener		
MB1-140-190	46 100 67 32	0.1
MB1½-2-2¼	46 100 67 33	0.1
MB2½-3	46 100 67 34	0.1
Bolt Breaker		
SB1-140-190	46 100 67 20	0.4
SB1½-2-2¼	46 100 67 21	0.7
SB2½-3	46 100 67 22	1.2
Quick Change Chuck		
SK1-3	46 100 67 42	0.2

Description	Width	Order No.	kg
Templates for MS1			
LL-MS1-600	600 mm	46 100 63 02	1.0
LL-MS1-750	750 mm	46 100 63 30	1.2
LL-MS1-900	900 mm	46 100 63 23	1.4
LL-MS1-1050	1050 mm	46 100 61 25	1.6
LL-MS1-1200	1200 mm	46 100 63 09	1.8
Templates for MS140			
LL-MS140-600	600 mm	46 100 63 00	1.0
LL-MS140-750	750 mm	46 100 63 28	1.2
LL-MS140-900	900 mm	46 100 63 21	1.4
LL-MS140-1050	1050 mm	46 100 62 60	1.6
LL-MS140-1200	1200 mm	46 100 63 07	1.8
Templates for MS190			
LL-MS190-600	600 mm	46 100 63 01	0.9
LL-MS190-750	750 mm	46 100 63 29	1.3
LL-MS190-900	900 mm	46 100 63 22	1.6
LL-MS190-1050	1050 mm	46 100 62 61	1.9
LL-MS190-1200	1200 mm	46 100 63 08	2.2
LL-MS190-1500	1500 mm	46 100 63 35	2.9
Templates for MS1½			
LL-MS1½-600	600 mm	46 100 63 04	0.9
LL-MS1½-750	750 mm	46 100 63 32	1.1
LL-MS1½-900	900 mm	46 100 63 25	1.4
LL-MS1½-1050	1050 mm	46 100 62 62	1.6
LL-MS1½-1200	1200 mm	46 100 63 11	1.8
LL-MS1½-1500	1500 mm	46 100 63 37	2.3
Templates for MS2			
LL-MS2-600	600 mm	46 100 63 05	1.1
LL-MS2-750	750 mm	46 100 63 33	1.4
LL-MS2-900	900 mm	46 100 63 26	1.6
LL-MS2-1050	1050 mm	46 100 63 38	1.9
LL-MS2-1200	1200 mm	46 100 63 12	1.9
LL-MS2-1500	1500 mm	46 100 63 39	2.8
Templates for MS2¼			
LL-MS2¼-600	600 mm	46 100 67 36	1.3
LL-MS2¼-750	750 mm	46 100 67 37	1.7
LL-MS2¼-900	900 mm	46 100 67 38	2.1
LL-MS2¼-1050	1050 mm	46 100 67 39	2.4
LL-MS2¼-1200	1200 mm	46 100 67 40	2.8
LL-MS2¼-1500	1500 mm	46 100 67 41	3.6
Templates for MS2½			
LL-MS2½-600	600 mm	46 100 63 42	1.6
LL-MS2½-750	750 mm	46 100 63 43	2.0
LL-MS2½-900	900 mm	46 100 63 44	2.4
LL-MS2½-1050	1050 mm	46 100 63 40	2.8
LL-MS2½-1200	1200 mm	46 100 63 13	3.2
LL-MS2½-1500	1500 mm	46 100 63 41	4.0
Templates for MS3			
LL-MS3-900	900 mm	46 100 63 45	2.4
LL-MS3-1050	1050 mm	46 100 63 46	2.8
LL-MS3-1200	1200 mm	46 100 63 47	3.2
LL-MS3-1500	1500 mm	46 100 63 48	4.0



Template for punching and keeping the correct pitch

You need Belt Cleaners? Please contact our specialists for further information

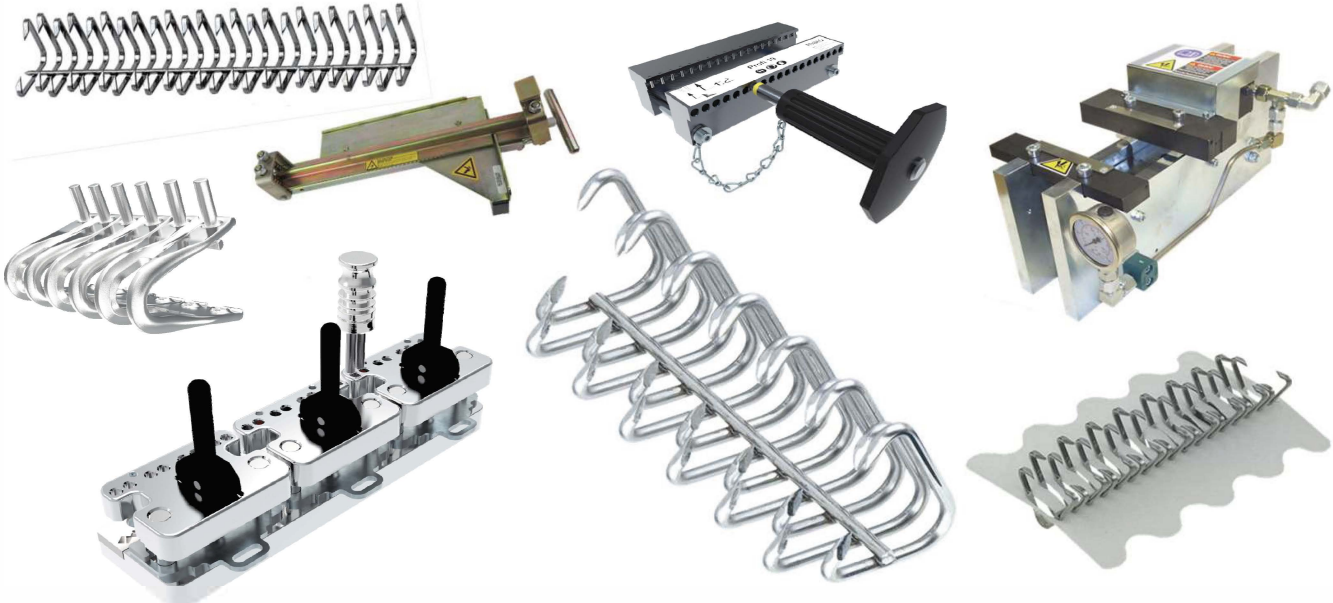

You need Belt Maintenance products for Conveyor Belts up to 750 kN/m?
Please contact our specialists for further information

mato

MAT0 Product Divisions:

Lubrication Equipment - Fluid Handling Products



Belt Maintenance Systems - Products for Conveyor Belts



Global expertise in Belt Maintenance Products

Valid from: 01.01.2018

All previous price lists are superseded by this price list.

mato



MATO GmbH & Co KG
Benzstr. 16-24
63165 Mühlheim a.M.
Germany
Tel.: +49 (0) 6108 - 906-0
Fax: +49 (0) 6108 - 906-120
www.mato.de
beltlacing@mato.de



MATO Industries Ltd.
Unit 1 Philips Road
Whitebirk Ind. Estate
Blackburn, Lancashire
BB1 5PG United Kingdom
Tel.: +44 (0) 1254 - 387638
Fax: +44 (0) 1254 - 238023
info@mato.co.uk



MATO Corporation
201 Resource Drive
Beckley, WV 25801
West Virginia USA
Tel.: +1- 304 - 255 1280
Fax: +1- 304 - 255 2501
info@mato-usa.com



MATO Kasachstan
Erzhanov Street 18
100009 Karaganda
Republic Kasachstan
Tel.: +7- (0) 7 212 910 063
Fax: +7- (0) 7 212 910 063
office@mato.kz



MATO France S.A.R.L.
Zone Artisanale du Grunhof
2 Rue du Grunhof
57890 Porcellette, France
Tel.: +33 -(0) 3 - 87821215
Fax: +33 - (0) 3 -87297213
mato.france@mato.de



MATO Iberica, S.L.
Pol. Industrial Mora Garay
Calle Marie Curie, parc. 36/38
E-33211 Gijón, Spain
Tel.: +34 (0) 985 - 328900 / 328211
Fax: +34 (0) 985 - 322647
matoiberica@matoiberica.es



MATO Suisse GmbH
Industriestrasse 53
CH-6034 Inwil
Switzerland
Tel.: +41 (0) 41 - 4490990
Fax: +41 (0) 41 - 4490992
info@mato.ch www.mato.ch



MATO Uglemechanisatija
Str. Krymskogo 27A
03142 Kiev
Ukraine
Tel.: +38 (0) 504759258
ygm1@mail.ru



MATO Australia Pty Ltd.
39 Bonville Avenue
Thornton, NSW 2322
Australia
Tel.: +61 1300-850 795
Fax: +61 2 4936-1388
maus@mato.com.au



MATO Industrial Technology (Qufu) Co., Ltd.
West End of Changchun Road,
Development Zone of Qufu City
273100 Qufu City, Shandong
China, PRC
Tel: +86-537-4533799
Fax: +86-537-4533299



MATO Sales Rep.Latinoamérica
Cra.41a N°22 Sur 87
Envigado,
Colombia
Tel.: +57 317 3620751
csouto@mato-latam.com



MATO Products Pty Ltd.
P.O. Box 224
Kempton Park 1620
28 Forge Road Spartan
South Africa
Tel.: +27 (0) 11-928 4163
Fax: +27 (0) 11-923 6071
matosales@multotec.co.za



MATO Sib
Uliza Telefontnaja 15
Kemerovo
652523 Leninsk-Kusnezkiy
Russian Federation
Tel.: +7 (0) 38456 35166
Fax: +7 (0) 38456 35166
mato-sib@yandex.ru



ISO 9001

